


BAPRO Proudly made in Poland !

Please see how many advantages we provide you.
Our plastering machine unit is characterised by well thought-out design.
We took care of details to ensure your satisfaction and work efficiency!



special edition
MAIN GEAR MOTOR 5,5 kW
116 rpm

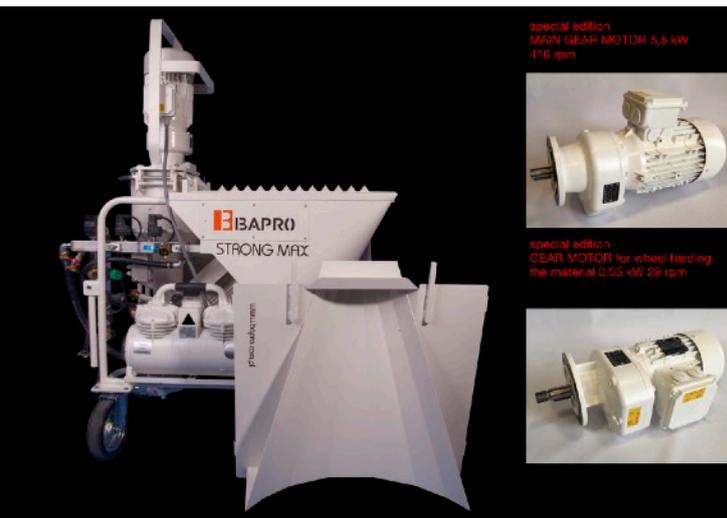

special edition
GEAR MOTOR for wheel feeding
the material 0,55 kW 29 rpm



GEAR MOTORS

Main gearmotor 5,5 kW 3-phase
Gearmotor wheel feedings the material 0,55 kW 3-phase

We have developed very good gearmotors especially for the needs of continuous work in cooperation with NORD companies.

This is very important because the operating conditions of continuous mixing of the premixed mortars with water must ensure a long service life.

That is why our gearmotors include a special hardened drive shaft and reinforced bearings.

The high torque combined with the increased speed results in a fast mortar spraying process.

Additives such as a safety tilt sensor and an automatic oil vent give very good engine performance and ensure safe operation.



AUTOMATION



AUTOMATION

During operation the plastering machine must perform a lot of cycles on and off. All components like engines, compressor, water pump or water and air fittings must work well. That is why our machine is characterized by very good control automatics.


We use the best class industrial automation.

Many solutions have been designed to ensure long-term efficiency and convenience of use.

Therefore, the main plug socket is directed forward to exclude pulling it from the cassette. Quickly, without effort, we put on and pull the plug. The most important details are located on the front panel to have an image of what is happening at work. Please note that we do not have any elements of operating the machine on the door to eliminate damage.

All buttons and signal lamps are made on LED diodes and contain a rubber cover against dirt and damage.

The locked door is on the key limiting the easy access of undesirable persons. Inside the cassette there is a special rubber gasket which protects the automation against dust and moisture. Our automation is characterized by maximum simplicity to exclude failures.

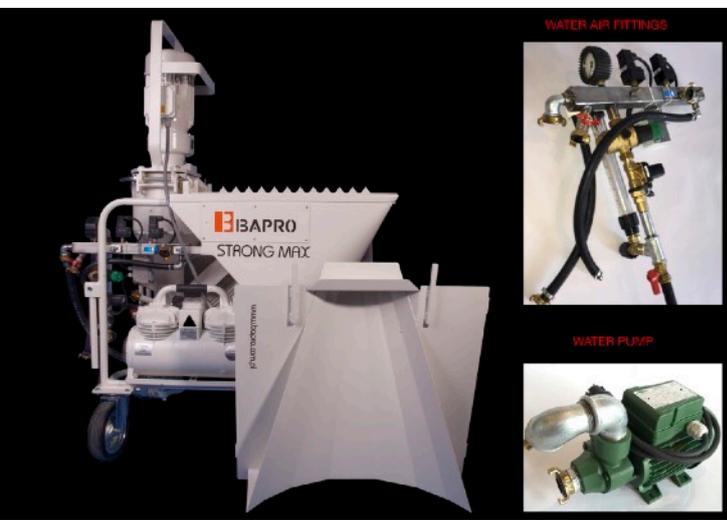

WATER - AIR FITTINGS and WATER PUMP

BAPRO plastering machines include the best components air and water oraz helpful water pump. You have to set the consistency parameter quickly and precisely depending on the type of material. That's why all our machines have a water system that includes:

- water and air module made of stainless steel. This is an important element of our system because it eliminates corrosion by protecting components from damage
- water pressure gauge in the rubber cover (indicates water pressure)
- water pressure reducer with cleaning screen (catches small elements that can damage the valve and stabilizes the water pressure)
- water solenoid valve (opens and closes the water supply process)
- a flow meter with a scale from 150 to 1500 l/h , allows you to assess the proportion of water to dry material
- a precise needle valve is used to regulate the water flow
- our system also includes a helpful water valve
- double water filtration system
- quick and easy replacement of components
- low cost of service (possibility of replacing a single part)
- visible arrangement of elements to quickly assess the situation

It should be remembered that the requirement is to obtain water pressure above 2.5 BAR, therefore our plastering machines contain installed water pumps. This stabilizes the machine's work.

The water pump is permanently attached to the machine on the shelf and is protected. So you do not have to worry about the problem of too low water pressure.

We took care of details to ensure your satisfaction and work efficiency!



COMPRESSOR

type HANDY K2 400 Volts or 230 Volts

All our plastering machines include the best quality compressor.


This is a very important addition to the machine because it plays a very important role.

Different types of plaster, in particular cement or cement-lime plaster, require a lot of air to make the material well sprayed.

Our compressor ensures that it gives an efficiency of 250 liters per minute.

What are the other additional advantages:

- it is an oil-free compressor
- includes two exchangeable filters that are easy to replace
- contains heads for good cooling
- a helpful handle as well as small dimensions and weight allow it to be easily moved from place to place
- the compressor contains a mounted pressure switch that allows the operator to turn the machine on and off via the air valve on the spray gun

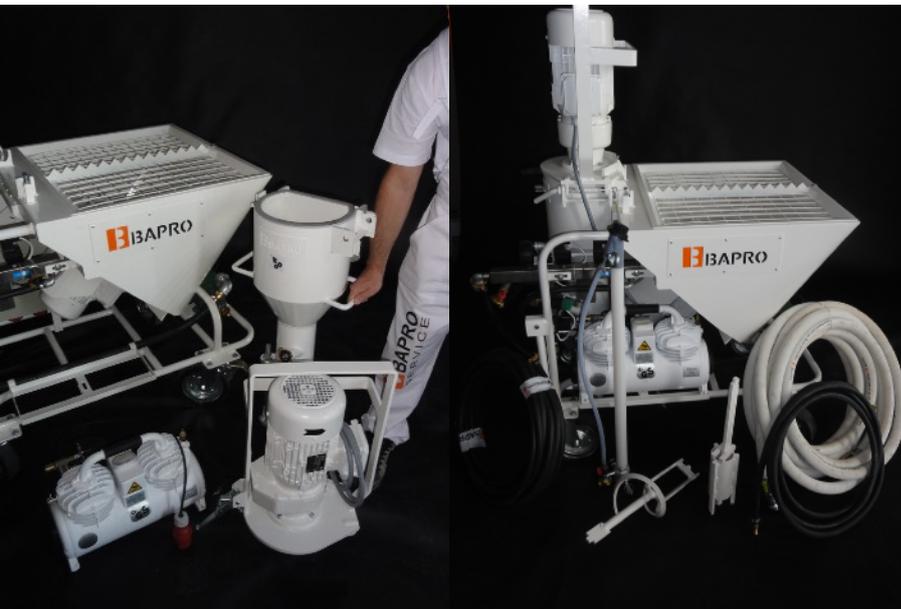

Our plastering machine unit is characterised by well thought-out design. Details count for us.

- easy transportation is enough for only two people
- convenient service , the ability to repair the component without the need to deliver the entire machine
- large container for the material 145 liters
- convenient dimensions, width only 72 cm
- easy maneuvering of the machine due to the use of wide rubber wheels with safety brakes, all wheels rotate around 360
- transport handles made of solid material not tubing are a guarantee of safety and ensure durability
- long spraying gun 100cm gives you greater comfort spray the upper stretches of the walls. Material hose, applied white rubber strong the material is resistant to wear. camlock connectors used easily allow button and unbutton while maintaining security. very helpful is the special rotary camlock that easily allows you to adjust the spray angle. white rubber will not to dirty the walls.

Now you know that BAPRO provides you high quality solutions with an attractive price!

We believe that our arguments convinced you to choose the BAPRO machine. Your order is highly appreciated.

We are ready to help you select the optimal plastering machine from our range of.

B BAPRO